



# EUSR SERIES 50HZ

Lightweight Submersible Residue Dewatering Pump



[www.apecpump.com](http://www.apecpump.com)

# EUSR SERIES 50HZ

Lightweight Submersible Residue Dewatering Pump



Steel coated with  
thermoplastic polyester elastomer  
**DU PONT Hytrel®**

## Feature

- / Submersible single-phase portable residue dewatering pump
- / Rubber lined base plate protects the floor surface from scratching
- / The wear parts are made of abrasion-resistant materials
- / Discharge direction is selectable between vertical and horizontal
- / Removal of residual water down to 3mm



## Application

- / Residential, commercial, industrial dewatering and site drainage
- / Construction sites and civil engineering projects
- / Basement, parking lots, removing residue water

## Specifications

Liquid Temperature		0~40°C (32~104°F)
Submersible depth		10M
Motor Part	Frequency	50Hz
	Pole	2 Pole
	Type	Dry Type
	Insulation	Class B
	Protection	IP 68
Pump Part	Protector	Auto-cut
	Bearing	Ball Type
	Mechanical seal	Double Mechanical Seal
	Impeller	Semi-Open


## Dimensions



Unit: mm


\* Pumping water can down to minimum level 3mm

## Performance Curve

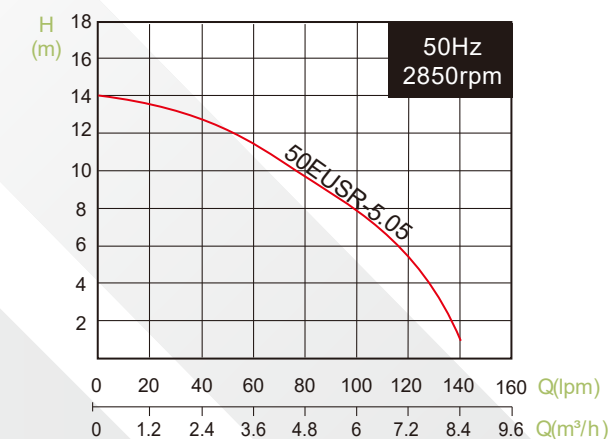

Type	Output		Discharge	F.L.A.		Rated		Maximum		Weight(W/O Cable)	
	HP	kW	Inch	1ø 230V	3ø 400V	Head m	Cap. lpm	Head m	Cap. lpm	1ø-kg	3ø-kg
50EUSR-5.05	0.5	0.37	2"	3A	0.9A	10	75	14	140	11.3	11.3

## Parts and Material List

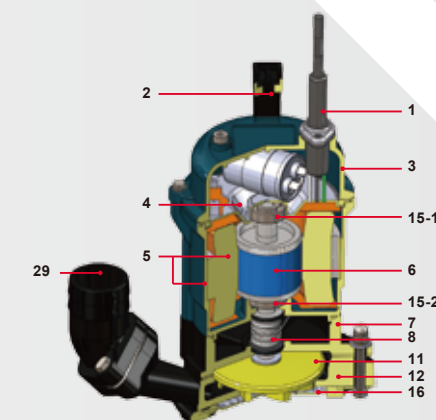

No	Part	Material
1	Cable	H07RN-F /SJTOW/STOW
2	Handle	Nylon 6
3	Motor Cover	ADC12
4	Bracket	Steel
5	Motor Housing + Stator	ADC12+Steel
6	Shaft with Rotor	AISI 410
7	Oil Chamber	Cast Iron
8	Mechanical Seal	Upper : CA/CE Lower : SIC/SIC
11	Impeller	Hytrel
12	Pump Casing	EN-GJL-200
15-1	Upper Bearing	NTN/TPI
15-2	Lower Bearing	NTN/TPI
16	Strainer	Steel+Rubber
29	Plastic Hoesetail	PP

Note:TPI is a family brand of NTN group.

All technical information is subject to change without notice.



**APEC PUMP ENTERPRISE CORP.**



3F.,No.394,Sec.2 Mingzhi Rd.,Taishan Dist.,New Taipei City 243,Taiwan.  
TEL: +886-2-29034567 Fax: +886-2-29064567